

Nov. 2025 Edition

ETW/UTV

TIRES

2025/26
GLOBAL



ARISUN



TOP 9

No. 9 of Top 75 Global Tyre Manufacturers



SINCE 1958

Established in Year 1958



30,000 EMPLOYEES

Support from Over 30,000 Employees



200 MARKETS

Trust from Customers Across More than 200 Markets

Zhongce Rubber Group Co., Ltd (ZC-Rubber) is a global tyre company based in Hangzhou, China and was founded in 1958. Over our more than 60 years of history, we experienced continuous growth in quality and reputation to become the Top 10 tyre manufacturer worldwide today.

Our engineers with our international R&D team focus on constant technological development and innovation spending millions of US dollars in research and development each year and upgrading our production and testing facilities. The ET Industrial Brain in the production process promises our smart production and guarantee tyres with high quality, safety, and value with maximum efficiency.

We have formed an extensive global service network of about 1,200 distributors with 250,000 sales locations in 160 countries. Our subsidiaries in Thailand, Germany, Brazil, and the United States serve customers without any difference in time and language. We are dedicated to better support our suppliers, distributors, and customers through a one-stop service.

Safe and Value are always the key of our company. We take pride in the superior quality of our tyre products and the first-rate services. We are still endeavoring to become one of the most respected tyre manufacturers globally and craft a better future with all partners and friends.



Most Advanced
Equipment



Best
Raw Material



Leanest
Management



Latest
Technology



Least
Energy Consumption



Most Suitable
Products

COMPANY MISSION



**WE ARE COMMITTED TO
ADVANCING TOWARDS
FUTURE MOBILITY**

COMPANY VISION



**TO BE A GLOBAL LEADING
TYRE MANUFACTURER**



China Compulsory Certification



US DOT Certification



European E-MARK Certification



SNI Certification of Indonesia



BIS Certification of India



INMETRO Certification of Brazil



Business Social Compliance Initiative

A new day has dawned bringing you a new line tires. Arisun tires are high quality, built with high tech features, and designed to perform. Whether off road, in the city, or on the track, you will enjoy the ride on Arisun Tires.

Arisun Tires are designed in the USA and manufactured by Zhongce Rubber Group Co., LTD., China’s largest tire manufacturer. ZC Rubber utilizes state of the art manufacturing equipment and ISO 9001 certified. investment in a new high tech Research & Development center ensures the latest innovation and technology are integrated into each product. Employing a work force of over 30,000 people that adhere to strict quality control system guarantees you top quality tires and tubes. ZC Rubber takes great pride in producing tires that are rated among the best in the world.

The Arisun Team is comprised of seasoned Tire Professionals with many years of experience in the tire industry. Our goal is to design the best performing tires for bicycles,automotive,truck,ATV,motorcycle . ZC Rubber produces top name brand tires for other famous tire manufactures as private labels and now we bring you the same high quality, latest technology, and best value under theArisun brand name.

ARISUN

www.arisun-atvtire.com

CONTENTS

// ATV-UTILITY 04

MATRIX-S	AR37
MAMMOTH RALLY	AR70
AFTER SHOCK XD	AR33
BRUISER XT	AR68
GEAR BUSTER	AR63
BRUISER VT	AR30
STEGO PRO	AR60
BRUISER XAT	AR69
SWAMP THING	AR49
MAD ZEST MT	AR11

// ATV-QUAD 18

MUD ZEST X	AR10
MILL-S	AR77
XC PLUS	AR05&AR06
ZUPER ACE	AR17&AR18
STEGO	AR08&AR07

// GOLF TIRE 26

ARMORY	AR27
new HUSHGRIP	AT20
new MILL-G	AR75
X TRAIL	AT06
CRUZE	AT21
X SPORT	TF06

// LAWN & GARDEN 34

TURF REX	TF01
TURF SAIL	TF02
SMOOTH	TF10
LAWN PRO	TF11

// SAND TIRE 38

DUNES	AR23&AR24
-------	-----------

ATV- UTILITY

ARISUN




2025/26

ATV/UTV AND MOTOCROSS TIRES CATALOG

MATRIX-S


AR37



✦ The 8Ply-Radial structure and multi-layer reinforced sidewall design, combined with high-performance UT tire specific compound, easily support maximum speed exceeding P (150 km/h)



TERRAIN STYLES

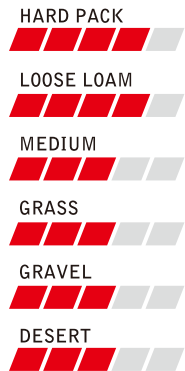

MATRIX-S

	Part No.	Pattern	Tire Size	Ply Rating	Load Index/Speed Rating	Overall Diameter (inch)	Section Width (inch)	Rim Size (inch)	Inflated Pressure (Psi)	Max. Load (lbs)	Tread Depth (mm)	CH	TH	IN
🇨🇳	V23701	AR37	30x10.00R14	8	89F	30.2	9.8	14x7.0	22	1280	18.5			
🇨🇳	V23703	AR37	32x10.00R14	8	85J	32.2	9.8	14x7.0	22	1140	18.5			
🇨🇳	V23702	AR37	30x10.00R15	8	89F	30.2	9.8	15x7.0	22	1280	18.5			
🇨🇳	V23704	AR37	UT32x10.00R15	8	93P	32.2	9.8	15x7.0	25	1430	18.5			
🇨🇳	V23705*	AR37	UT33x10.00R15	8	96P	33.2	10.2	15x7.0	25	1570	18			
🇨🇳	V23706	AR37	UT35x10.00R15	8	99P	35.4	10.4	15x7.0	25	1710	18			


Note: 🇨🇳 China 🇹🇭 Thailand 🇮🇩 Indonesia

MAMMOTH RALLY

AR70



TERRAIN STYLES

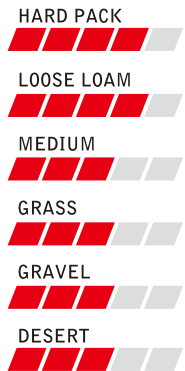

MAMMOTH RALLY

	Part No.	Pattern	Tire Size	Ply Rating	Load Index/Speed Rating	Overall Diameter (inch)	Section Width (inch)	Rim Size (inch)	Inflated Pressure (Psi)	Max. Load (lbs)	Tread Depth (mm)	CH	TH	IN
🇨🇳	V27001	AR70	30X10.00R14	8	81J	30.2	9.8	14x7.0	22	1020	18			
🇨🇳	V27002	AR70	32x10.00R14	8	85J	32.2	9.8	14x7.0	22	1140	18			
🇨🇳	V27004*	AR70	30x10.00R15	8	80J	30.2	9.8	15x7.0	22	990	18			
🇨🇳	V27003	AR70	32x10.00R15	8	85J	32.2	9.8	15x7.0	22	1140	18			
🇨🇳	V27005*	AR70	33x10.00R15	8	87J	33.2	10.2	15x7.0	22	1200	18			
🇨🇳	V27006*	AR70	35x10.00R15	8	91J	35.2	10.2	15x7.0	22	1355	18			




// ATV-UTILITY

AFTER SHOCK XD

AR33




- + Large tread lugs with siped construction can handle the toughest terrain on or off road.
- + Radial Tire for Xtreme Duty with Aramid reinforced sidewalls to protect against punctures.
- + Aggressive sidewall for added traction when climbing over rocks.
- + Reinforced 8 ply construction for added comfort and safety.

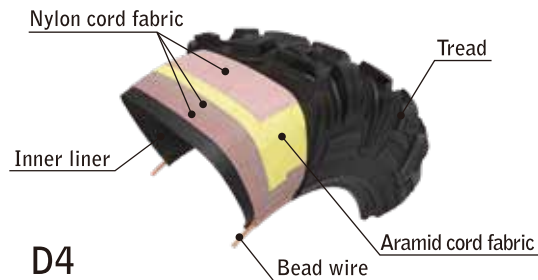

D4

TERRAIN STYLES

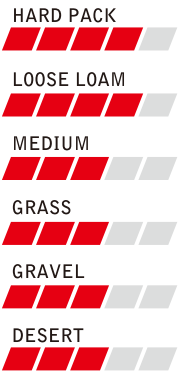

AFTER SHOCK XD

	Part No.	Pattern	Tire Size	Ply Rating	Load Index/Speed Rating	Overall Diameter (inch)	Section Width (inch)	Rim Size (inch)	Inflated Pressure (Psi)	Max. Load (lbs)	Tread Depth (mm)	
CH												
TH												
IN												
CH	R13301	AR33	AT30x10R14	8	64F	30	10	14x8.0	8	615	15	D4
CH	R13302	AR33	AT30x10R15	8	63F	30	10	15x8.0	8	600	15	D4
CH	R13305	AR33	AT32x10R14	8	68M	32.2	10	14x8.0	22	695	15	D4
CH	R13306	AR33	AT32x10R15	8	67M	32.2	10	15x8.0	22	675	15	D4
CH	R13308	AR33	AT35x10R15	8	84M	35.2	10.5	15x7.0	22	1710	15	D4
CH	V23301	AR33	AT30x10R14	8	64F	30	10	14x8.0	8	615	15	
CH	V23302	AR33	AT30x10R15	8	63F	30	10	15x8.0	8	600	15	
CH	V23303	AR33	AT28x10R14	8	59F	28.2	10	14x8.0	8	535	15	
CH	V23305	AR33	AT32x10R14	8	68M	32.2	10	14x8.0	22	695	15	
CH	V23304	AR33	AT28x10R15	8	59F	28.2	10	15x8.0	8	535	15	
CH	V23306	AR33	AT32x10R15	8	67M	32.2	10	15x8.0	22	675	15	
CH	V23307	AR33	AT33x9.5R15	8	69M	33.5	10.4	15x7.0	22	715	13	
CH	V23308	AR33	AT35x10R15	8	84M	35.2	10.5	15x7.0	22	1710	15	

// ATV-UTILITY


BRUISER XT

AR68



- + Deep lugs with non-directional pattern for optimum climbing performance.
- + Radial construction with wide footprint for exceptional traction.
- + Shoulder tread with plenty of side bite and to claw through off-camber terrain.
- + Excellent all around tire and suitable for desert, dirt, and rock.

TERRAIN STYLES

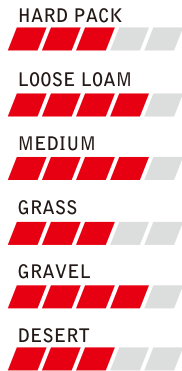

BRUISER XT

	Part No.	Pattern	Tire Size	Ply Rating	Load Index/Speed Rating	Overall Diameter (inch)	Section Width (inch)	Rim Size (inch)	Inflated Pressure (Psi)	Max. Load (lbs)	Tread Depth (mm)	
CH												
TH												
IN												
CH	V26801	AR68	AT25x8R12	8	47F	25.2	8	12x6.5	8	385	21	
CH	V26802	AR68	AT25x10R12	8	54F	25.2	10	12x8.0	8	465	22	
CH	V26803	AR68	AT26x9R12	6	53F	26.2	9	12x7.0	8	455	21	
CH	V26804	AR68	AT26x10R12	6	56F	26.2	10	12x8.0	8	495	22	
CH	V26805	AR68	AT26x12R12	8	63F	26.2	12	12x9.5	8	600	22	
CH	V26808	AR68	AT27x9R12	6	52F	27	9	12x7.0	7	440	20	
CH	V26809	AR68	AT27x12R12	6	60F	27	12	12x9.5	7	550	20	
CH	V26806	AR68	AT28x10R14	8	59F	28.2	10	14x8.0	8	535	22	
CH	V26807	AR68	AT30x10R14	8	64F	30.2	10	14x8.0	8	615	22	




GEAR BUSTER

AR63



- * Cross tread designed to handle extreme abuse
- * that UTV's encounter driving over the harshest conditions.
- * Large pocket and siped tread blocks provide traction for rock crawling.
- * Arisun Xtreme Armor has got you covered with Aramid Reinforced Sidewall providing added safety against flats! K4D Armor = Aramid reinforced composite material inside tire providing defense against punctures, cuts, and abrasion.
- * This tire is the total package for all Off Road Performance!

TERRAIN STYLES

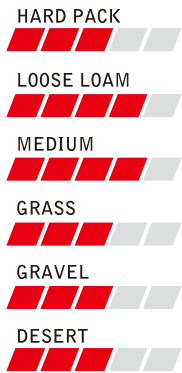

GEAR BUSTER


	Part No.	Pattern	Tire Size	Ply Rating	Load Index/Speed Rating	Overall Diameter (inch)	Section Width (inch)	Rim Size (inch)	Inflated Pressure (Psi)	CH Max. Load (lbs)	TH Tread Depth (mm)	IN
●	V26301	AR63	26x10R12	8	56F	26.2	10	12x8.0	8	480	18.3	
●	V26306	AR63	26x9-12	6	78F	26	9	12x7.0	22	935	16	
●	V26307	AR63	26x11-12	6	84F	26	11	12x9.0	22	1100	16	
●	V26302	AR63	26x10R14	8	55F	26.2	11	14x9.0	8	520	18.3	
●	V26303	AR63	28x10R14	8	59F	28.2	10	14x8.0	8	535	18.3	
●	V26304	AR63	30x10R14	8	64F	30.2	10	14x8.0	8	615	18.3	
●	V26305	AR63	30x10R15	8	63F	30.2	10	15x8.0	8	600	18.3	

BRUISER VT

AR30



TERRAIN STYLES

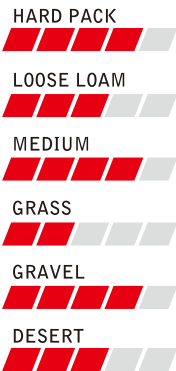

BRUISER VT


	Part No.	Pattern	Tire Size	Ply Rating	Load Index/Speed Rating	Overall Diameter (inch)	Section Width (inch)	Rim Size (inch)	Inflated Pressure (Psi)	Max. Load (lbs)	Tread Depth (mm)
NEW	V23001	AR30	27x9.00R14	6	60L	27.2	8.8	14x7.0	22	550	18
NEW	V23002	AR30	27x11.00R14	6	66L	27.2	10.8	14x9.0	22	660	18
NEW	V23005	AR30	29x9.00R14	8	84J	29.4	9	14x7.0	32	1100	20
NEW	V23006	AR30	29x11.00R14	8	90J	29.4	11	14x9.0	34	1320	20
NEW	V23003	AR30	30x10.00R14	8	70M	30.3	10.2	14x8.0	30	740	18.5
NEW	V23004	AR30	30x10.00R15	8	69M	30.3	10.2	15x8.0	30	715	18.5

STEGO PRO

AR60



TERRAIN STYLES

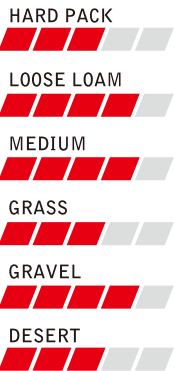

STEGO PRO


	Part No.	Pattern	Tire Size	Ply Rating	Load Index/Speed Rating	Overall Diameter (inch)	Section Width (inch)	Rim Size (inch)	Inflated Pressure (Psi)	Max. Load (lbs)	Tread Depth (mm)
NEW	V26007	AR60	25x8R12	6	68J	25.2	7.9	12X6.5	26	695	17.5
NEW	V26008	AR60	25x10R12	6	75J	25.2	9.8	12X8.0	26	855	17.5
NEW	V26003	AR60	26x9.00R14	6	64K	26	9	14x7.0	22	615	18.5
NEW	V26004	AR60	26x11.00R14	6	71K	26	11	14x9.0	22	760	18.5
NEW	V26001	AR60	27x9.00R14	6	60L	27.3	8.8	14x7.0	22	550	20.0
NEW	V26002	AR60	27x11.00R14	6	66L	27.3	10.8	14x9.0	22	660	20.0
NEW	V26005	AR60	29x9.00R14	8	84J	29.4	9	14x7.0	32	1100	20.0
NEW	V26006	AR60	29x11.00R14	8	90J	29.4	11	14x9.0	34	1320	20.0

BRUISER XAT

AR69



TERRAIN STYLES

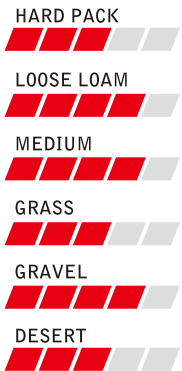

BRUISER XAT


	Part No.	Pattern	Tire Size	Ply Rating	Load Index/Speed Rating	Overall Diameter (inch)	Section Width (inch)	Rim Size (inch)	Inflated Pressure (Psi)	Max. Load (lbs)	Tread Depth (mm)
🇨🇭	V26909	AR69	AT24x8-12	4	31J	24	8	12x6.5	5	240	16
🇨🇭	V26910	AR69	AT24x10-12	4	39J	24	10	12x8.0	5	300	16
🇨🇭	V26905	AR69	AT25x8R12	6	60J	25	8	12x6.5	18	555	18
🇨🇭	V26906	AR69	AT25x10R12	6	68J	25	10	12x8.0	18	695	18
🇨🇭	V26907	AR69	AT26x9R12	6	66J	26	9	12x7.0	22	935	18
🇨🇭	V26908	AR69	AT26x10R12	6	69J	26	10	12x8.0	22	1020	18
🇨🇭	V26913	AR69	26x8.00-14	6	56K	26	8	12x6.5	18	495	20
🇨🇭	V26901	AR69	AT26x9R14	6	77F	26	9	14x7.0	22	910	18
🇨🇭	V26914	AR69	26x10.00-14	6	64K	26	10	12x8.0	18	615	20
🇨🇭	V26902	AR69	AT26x11R14	6	84F	26	11	14x9.0	22	1100	18
🇨🇭	V26903	AR69	AT27x9R14	6	79F	27	9	14x7.0	22	965	18
🇨🇭	V26904	AR69	AT27x11R14	6	86F	27	11	14x9.0	22	1170	18

SWAMP THING


AR49



- Monster tread that's cupped to churn thru swamps.
- Shoulder tread with hooked tooth designed for added side bite!
- Medium Soft Compound grips for added traction thru sand, gravel, dirt, mud and anything that this beast can encounter!
- N4D protection - Four layers of special nylon reinforced composite material provides extra defense against punctures.

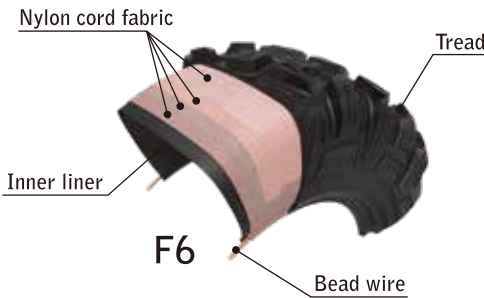

TERRAIN STYLES

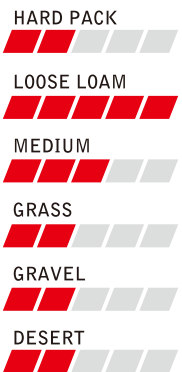

SWAMP THING

	Part No.	Pattern	Tire Size	Ply Rating	Load Index/Speed Rating	Overall Diameter (inch)	Section Width (inch)	Rim Size (inch)	Inflated Pressure (Psi)	Max. Load (lbs)	Tread Depth (mm)
🇨🇭	R14901	AR49	AT27x9-14	8	54F	26.8	9	14x7.0	8	465	38
🇨🇭	R14902	AR49	AT27x11-14	8	60F	26.8	11	14x9.0	8	550	38
🇨🇭	R14903	AR49	AT28x10-14	8	59F	28	10	14x8.0	8	535	38
🇨🇭	R14906	AR49	AT30x9.00-14	8	62F	30	9	14x7.0	8	585	38
🇨🇭	R14904	AR49	AT30x10-14	8	64F	30	10	14x8.0	8	615	38
🇨🇭	R14905	AR49	AT32x10-14	8	68F	32	10	14x8.0	8	695	38


MΛdZest MT

AR11



- ✦ Heavy Duty Utility Tire with reinforced Aramid belt for added puncture protection.
- ✦ Directional Chevron tread with 8 ply construction handles any trail.
- ✦ Tread designed for smooth rolling over hard pack surfaces.
- ✦ Large shoulder lug for added side bite. Radial construction makes for a balanced tire with large foot print and exceptional traction.
- ✦ Self-cleaning tread design cleans out Mud and Debris.

TERRAIN STYLES

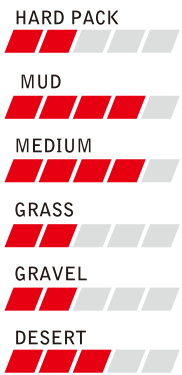

MΛd Zest MT

	Part No.	Pattern	Tire Size	Ply Rating	Load Index/Speed Rating	Overall Diameter (inch)	Section Width (inch)	Rim Size (inch)	Inflated Pressure (Psi)	Max. Load (lbs)	Tread Depth (mm)
●	ID(V21101)	AR11	AT25×8R12	8	47F	25	8	12×6.5	8	385	23
●	ID(V21102)	AR11	AT25×10R12	8	54F	25	10	12×8.0	8	465	25
●	ID(V21103)	AR11	AT26×9R12	8	53F	26.2	9	12×7.0	8	455	23
●	ID(V21104)	AR11	AT26×10R12	8	56F	26.2	10	12×8.0	8	495	25
●	V21105	AR11	AT28×10R12	8	61F	28.2	10	12×8.0	8	565	25
●	V21106	AR11	AT28×12R12	8	66F	28.2	12	12×9.5	8	665	25
●	ID(V21107)	AR11	AT26×12R12	8	63F	26.2	12	12×9.5	8	600	25
●	V21108	AR11	AT27×9R14	8	54F	27.2	9	14×7.0	8	465	23
●	V21109	AR11	AT27×11R14	8	60F	27.2	11	14×9.0	8	550	25
●	V21110	AR11	AT28×10R14	8	59F	28.2	10	14×8.0	8	535	25.5



ATV - QUAD

ARISUN




// ATV-QUAD

MUD ZEST X

AR10



TERRAIN STYLES

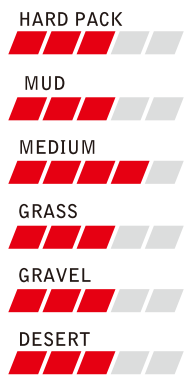

MUD ZEST X

	Part No.	Pattern	Tire Size	Ply Rating	Load Index/Speed Rating	Overall Diameter (inch)	Section Width (inch)	Rim Size (inch)	Inflated Pressure (Psi)	Max. Load (lbs)	Tread Depth (mm)
	V21001	AR10	AT22X7-10	4	28K	22	7	10x5.5	5	220	12.0
	V21002	AR10	AT22X10-10	4	39K	22	10	10x8.0	5	300	13.0
	V21003	AR10	AT24X8-12	4	31J	23.9	8	12x6.5	5	240	15.5
	V21004	AR10	AT24X10-12	4	39J	23.9	9.8	12x8.0	5	300	15.5
	V21005	AR10	AT25x8-12	6	43J	24.9	8	12x6.5	7	340	18.0
	V21006	AR10	AT25x10-12	6	50J	24.9	9.8	12x8.0	7	410	18.0


// ATV-QUAD

MILL-S

AR77



TERRAIN STYLES

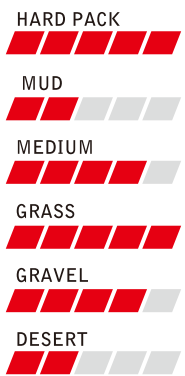

MILL-S

	Part No.	Pattern	Tire Size	Ply Rating	Load Index/Speed Rating	Overall Diameter (inch)	Section Width (inch)	Rim Size (inch)	Inflated Pressure (Psi)	Max. Load (lbs)	Tread Depth (mm)
	V27701	AR77	AT 25x8R12	6	68J	25.2	8	12x6.5	26	695	13.5
	V27702	AR77	AT 25x10R12	6	75J	25.2	10	12x8.0	26	855	13.5
	TH(V37701)	AR77	22x10-14	4	/	22.2	9.0	14X7.0	12	855	12
	TH(V37702)	AR77	23x10-14	4	85B	22.9	8.9	14X7.0	24	1140	12


XC PLUS

AR05/AR06



- * High performance tread design with advance rubber compound.
- * Flexible Dog Bone tread pattern digs in for quick acceleration.
- * Wide spacing between knobs provides better traction and clean-out.
- * Angled shoulder knob increases side bite for cornering.

TERRAIN STYLES

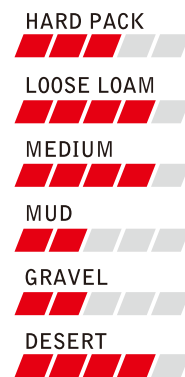

XC PLUS


	Part No.	Pattern	Tire Size	Ply Rating	Load Index/Speed Rating	Overall Diameter (inch)	Section Width (inch)	Rim Size (inch)	Inflated Pressure (Psi)	Max. Load (lbs)	Tread Depth (mm)
CH											
TH											
IN											
●	V10501	AR05	AT21×7-10	6	30F	21.2	7	10×5.5	7	235	12.0
●	V10502	AR05	AT22×7-10	6	33F	22.2	7	10×5.5	7	255	12.0
●	V10503	AR05	AT23×7-10	6	36F	23.2	7	10×5.5	7	275	12.0
●	V10604	AR06	AT20×11-8	6	43F	20.2	11	8×9.0	7	340	14.5
●	ID(V10602)	AR06	AT20×11-9	6	43F	20.2	11	9×9.0	7	340	14.5
●	ID(V10603)	AR06	AT22×11-9	6	48F	22.2	11	9×9.0	7	395	14.5
●	V10601	AR06	AT20×11-10	6	42F	20.2	11	10×9.0	7	330	14.5
●	ID(V10605)	AR06	AT22×11-10	6	47F	22.2	11	10×9.0	7	385	14.5
●	V10606	AR06	AT22×10-10	4	39K	20	10	10×8.0	5	300	14.5

ZUPER ACE

AR17/AR18



TERRAIN STYLES

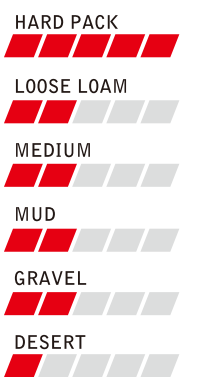

XCZUPER ACE


	Part No.	Pattern	Tire Size	Ply Rating	Load Index/Speed Rating	Overall Diameter (inch)	Section Width (inch)	Rim Size (inch)	Inflated Pressure (Psi)	Max. Load (lbs)	Tread Depth (mm)
CH											
TH											
IN											
●	V11703	AR17	AT19×7-8	4	20N	19	7	8×5.5	22	175	10
●	V11701	AR17	AT20×7-8	4	23N	20	7	8×5.5	22	195	10
●	V11702	AR17	AT22×7-10	4	25N	22	7	10×5.5	22	205	10
●	V11804	AR18	18×9.50-8	4	28N	18	9.4	8×7.0	22	220	10
●	V11801	AR18	AT22×10-8	4	39N	22	10	8×8.0	22	300	10
●	V11803	AR18	AT20×10-9	4	34N	20	10	9×8.0	22	260	10
●	V11802	AR18	AT22×10-10	4	55N	22	10	10×8.0	22	480	10

STEGO

AR08/AR07



TERRAIN STYLES

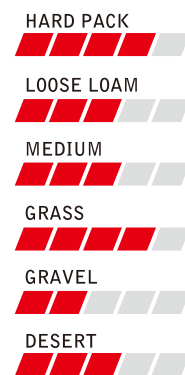

STEGO

	Part No.	Pattern	Tire Size	Ply Rating	Load Index/Speed Rating	Overall Diameter (inch)	Section Width (inch)	Rim Size (inch)	Inflated Pressure (Psi)	CH	TH	IN
	V10801	AR08	AT18x8.5-8	4	22F	17.8	8.2	8x7.0	5	185	10	
	V10701	AR07	AT19x6-10	4	13F	18.8	5.8	10x5.0	5	145	10	



26 // ARISUN-ATVTIRE.COM

HUSHGRIP NEW
AR20



HUSHGRIP

	Part No.	Pattern	Tire Size	Ply Rating	Load Index/Speed Rating	Overall Diameter (inch)	Section Width (inch)	Rim Size (inch)	Inflated Pressure (Psi)	CH	TH	IN
										●	●	●
NEW	TH(V32001)	AR20	215/35R14	4	69J	515mm	205mm	14x7.0	30	715	5.9	

MILL-G NEW
AR75



MILL-G

	Part No.	Pattern	Tire Size	Ply Rating	Load Index/Speed Rating	Overall Diameter (inch)	Section Width (inch)	Rim Size (inch)	Inflated Pressure (Psi)	CH	TH	IN
										●	●	●
NEW	225/50R14	AR75	225/50R14	4	77N	580mm	225mm	14x7.0	32	910	6.0	

X TRAIL

AT06



X TRAIL

	Part No.	Pattern	Tire Size	Ply Rating	Load Index/Speed Rating	Overall Diameter (inch)	Section Width (inch)	Rim Size (inch)	Inflated Pressure (Psi)	CH ●	TH ●	IN ●
●	R30605	AT06	20×10-10	6	74F	20	9.6	10×7.0	22	825	14.0	
●	R30606	AT06	22×11-10	4	76F	22.8	10.4	10×7.0	22	880	14.0	
●	TH(R30103)	AT06	23×10.50-12NHS	6	100F	23.2	10.5	12×8.5	32	1760	14.0	
●	R30601	AT06	25×10-12NHS	6	96J	25.3	9.8	12×8.0	32	1565	17.5	
●	R30602	AT06	25×11-12NHS	6	102J	25.3	10.8	12×9.0	32	1870	17.5	
●	R30607	AT06	23×10-14	6	79F	23.5	9.6	10×7.0	30	965	14.0	
●	R30608	AT06	23×10-15	6	78F	24	8.5	15×7.0	30	935	12.0	

CRUZE

AT21



CRUZE

	Part No.	Pattern	Tire Size	Ply Rating	Load Index/Speed Rating	Overall Diameter (mm)	Section Width (mm)	Rim Size (inch)	Inflated Pressure (Psi)	CH ●	TH ●	IN ●
●	R32107	AT21	22×10-10	4	77F	22 (Inch)	9.6 (Inch)	10×7.0	20	910	9.5	
●	ID(R32102)	AT21	205/50-10	4	67F	460	205	10×7.0	30	675	5.5	
●	ID(R32103)	AT21	205/65-10	4	68F	520	205	10×7.0	24	695	6.5	
●	R32105	AT21	205/30-12	4	53F	460	205	12×7.0	24	455	5.0	
●	R32101	AT21	215/35-12	4	66F	460	205	12×7.0	30	660	5.0	
●	ID(R32104)	AT21	215/50-12	4	70F	520	205	12×7.0	30	660	5.5	
●	ID(R32106)	AT21	205/30-14	4	57F	535	205	14×7.0	24	505	5.0	
●	R32108	AT21	215/35-15	4	66F	550	205	15×7.0	30	660	5.0	

X SPORT


TF06



X SPORT

	Part No.	Pattern	Tire Size	Ply Rating	Load Index/ Speed Rating	Overall Diameter (mm)	Section Width (mm)	Rim Size (inch)	Inflated Pressure (Psi)	Max. Load (lbs)	Tread Depth (mm)
CH	V30601	TF06	205/50-10	4	67J	460	205	10×7.0	30	675	5.5
TH	V30604	TF06	205/65-10	4	68J	520	205	10×7.0	24	695	6.5
IN	V30605	TF06	215/50-12	4	70J	520	205	12×7.0	30	660	5.5
	V30602	TF06	215/35-12	4	66J	460	210	12×7.0	30	660	5.5
	V30603	TF06	205/30-14	4	57J	535	205	14×7.0	24	505	5.0



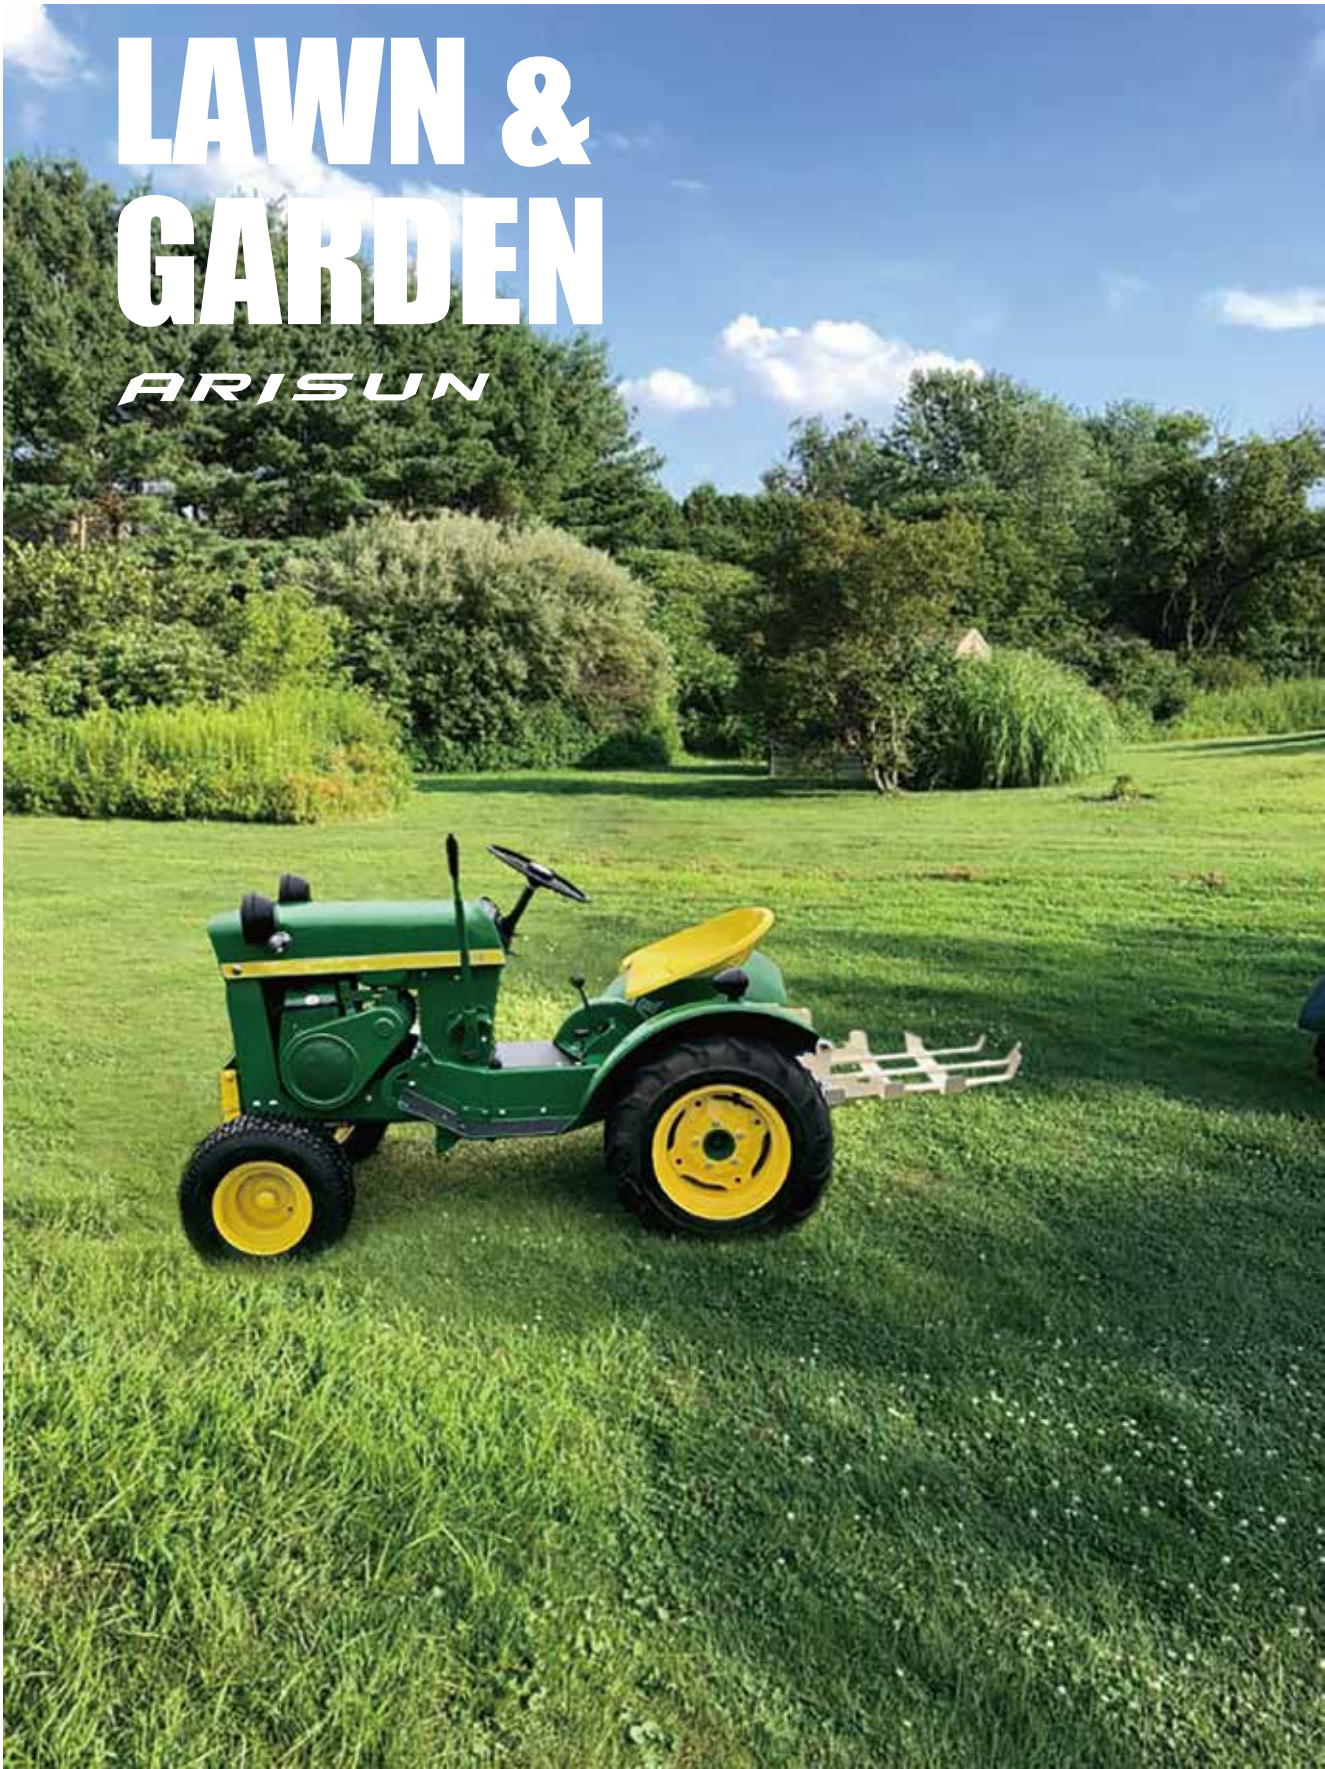

// LAWN & GARDEN

TURF REX
TF01



TURF REX

										CH	TH	IN
		Part No.	Pattern	Tire Size	Ply Rating	Overall Diameter (inch)	Section Width (inch)	Rim Size (inch)	Inflated Pressure (Psi)	Max. Load (lbs)	Tread Depth (mm)	
NEW		ID(V40109)	TF01	13x5.00-6NHS	4	12.6	4.8	6x3.5	40	440	4.0	
		V40104	TF01	15x6.00-6NHS	2	14.4	6	6x4.5	14	365	4.0	
		V40105	TF01	20x8.00-8NHS	4	19.8	8	8x6.5	22	855	6.0	
		V40106	TF01	18x8.50-8NHS	2	17.7	8.4	8x7.0	22	520	6.0	
		V40107	TF01	16x6.50-8NHS	4	16.2	6.5	8x5.375	28	615	4.5	
		V40108	TF01	20x10.00-8NHS	4	19.8	9.6	8x7.0	22	1200	6.0	

TURF SAIL

TF02



TURF SAIL

	Part No.	Pattern	Tire Size	Ply Rating	Overall Diameter (inch)	Section Width (inch)	Rim Size (inch)	Inflated Pressure (Psi)	Max. Load (lbs)	Tread Depth (mm)	CH	TH	IN
  	V40201	TF02	18x8.50-8NHS	4	17.7	8.4	8x7.0	22	825	6.0			



TF10

SMOOTH

	Part No.	Pattern	Tire Size	Ply Rating	Overall Diameter (inch)	Section Width (inch)	Rim Size (inch)	Inflated Pressure (Psi)	Max. Load (lbs)	CH	TH	IN
 	V41001	TF10	11X4.00-5NHS	4	11.0	4.0	5x3.0	46	330			
 	V41002	TF10	11X6.00-5NHS	4	11.0	6.0	5x5.0	42	440			
 	V41003	TF10	13X6.50-6NHS	4	12.8	6.4	6x5.0	28	480			
  	ID(V41004)	TF10	13x5.00-6NHS	4	12.6	4.8	6x3.5	40	440			

LAWN PRO

TF11



LAWN PRO

	Part No.	Pattern	Tire Size	Ply Rating	Overall Diameter (inch)	Section Width (inch)	Rim Size (inch)	Inflated Pressure (Psi)	Max. Load (lbs)	Tread Depth (mm)	CH	TH	IN
 	V41106	TF11	13x5.00-6	4	12.6	4.8	6x3.5	40	440	5.0			
 	V41107	TF11	13x6.50-6	4	12.8	6.4	6x5.375	28	480	5.0			
 	ID(V41110)	TF11	15x6.00-6NHS	2	14.4	6	6x4.5	14	365	5.0			
 	ID(V41111)	TF11	4.80/4.00-8	2	16.6	4.7	8x3.75	20	435	4.4			
 	V41103	TF11	16x6.50-8NHS	4	16.0	6.5	8x5.375	28	615	6.0			
 	V41104	TF11	18x6.50-8NHS	4	18.0	6.4	8x5.0	28	760	6.0			
 	V41105	TF11	18x8.50-8NHS	4	17.7	8.4	8x7.0	22	825	6.0			
 	V41108	TF11	18x9.50-8NHS	4	18	8.9	8x7.5	20	935	6.0			
 	V41101	TF11	20x8.00-8NHS	4	19.8	8	8x6.5	22	855	7.0			
 	V41102	TF11	20x10.00-8NHS	4	19.8	9.6	8x7.0	22	1200	7.0			
 	ID(V41112)	TF11	18x8.50-10NHS	4	18.2	8.0	10x7.0	22	795	6.0			
 	ID(V41113)	TF11	20x10.00-10NHS	4	20	9.6	10x8.0	22	1170	7.0			
 	ID(V41114)	TF11	23x10.50-12	4	23.2	10	10x8.5	20	1320	7.0			
 	V41109	TF11	24x12.00-12	4	23.8	11.6	12x10.5	20	1710	9.0			



SAND TIRE

ARISUN

DUNES

AR23/AR24



DUNES

Part No.	Pattern	Tire Size	Ply Rating	Load Index/Speed Rating	Overall Diameter (inch)	Section Width (inch)	Rim Size (inch)	Inflated Pressure (Psi)	Max. Load (lbs)	Tread Depth (mm)	CH	TH	IN
V52301	AR23	28x9.00-14NHS	8	65F	28	8.8	14x7.0	10	635	12.8			
V52401	AR24	28x11.00-14NHS	8	79F	28	10.8	14x9.0	15	965	22.0			



//NOTES

20 horizontal dashed lines for notes



//NOTES

20 horizontal dashed lines for notes